

Setting up WPA3

Goal: To set up LANforge wireless access points and clients with WPA3.

This example will cover WPA3-Personal, WPA3-Enterprise and OWE.

For an introduction or review of WPA3, see [Hemant Chaskar's WLPC video](#).

1. WPA3-Personal for a VAP and a STA client.

A. Setup the VAP with SSID, WPA3 security and a PSK.

The screenshot shows the configuration window for 'vap2 (ct521-1ac-f20) Configure Settings'. The 'Port Status Information' section shows 'Current: LINK-UP GRO NONE' and 'Driver Info: Port Type: WIFI-AP Parent: wiphy1'. The 'Port Configurables' section is active, with the 'Standard Configuration' tab selected. Under 'General Interface Settings', 'DHCP-IPv4' is checked, and the IP address is set to '20.100.1.1'. The 'WiFi Settings' section is highlighted with a red box, showing 'SSID: ABCD-wpa3', 'Key/Phrase: hello123', and 'WPA3' selected under the security options. Other settings include 'Mode: (802.11abgn-AC)', 'DTIM-Period: 2', and 'Beacon: 240'. The 'Low Level' section has 'GRO Enabled' checked.

B. Setup the VAP with 11w PMF option Required.

Port Status Information
Current: LINK-UP GRO NONE
Driver Info: Port Type: WIFI-AP Parent: wiphy1 wiphy1...

Port Configurables
Standard Configuration **Advanced Configuration** Misc Configuration Custom WiFi

Advanced WiFi Settings

Select 'WPA2' on the Standard Configuration screen to enable Advanced/802.1x and enable Advanced/802.1x to enable most of these. Enabling 802.11u enables others.

Pairwise Ciphers: DEFAULT Group Ciphers: DEFAULT
Ignore Probes: zero (0%) HESSID: 00:00:00:00:00:00
Ignore Auth-Assoc: zero (0%) Realm:
Ignore Assoc: zero (0%) IMSI:
Ignore Re-Assoc: zero (0%) Milenage:
Corrupt GTK: zero (0%) Domain:
HS20 Capabilities Consortium:
HS20 Oper Class RADIUS IP: 127.0.0.1
HS20 WAN Metrics RADIUS Port: 1812
leee80211w: Required (2) RADIUS Secret: lanforge
Venue Group: Unspecified (0) Venue Type: Unspecified (0)
Network Type: Private (0) Address Types: Not Available (0)
Network Auth: 3GPP Cell Net:
 Use 80211d Use 80211h BSS-Load Neighbor Reports BSS Transition
 Advanced/802.1x Short-Preamble HotSpot 2.0 Disable DGAF
 Enable 802.11u 802.11u Internet 802.11u ASRA 802.11u ESR 802.11u UESA

Print Display Logs Probe Display Scan Sync Apply OK Cancel

C. Setup the STA with SSID, WPA3 security and a PSK.

The screenshot shows the configuration interface for a wireless station (sta202). The window title is "sta202 (ct523-3n-f20) Configure Settings".

Port Status Information:
Current: LINK-UP GRO Authorized
Driver Info: Port Type: WIFI-STA Parent: wiphy2 [wiphy2...]

Port Configurables:
Standard Configuration | Advanced Configuration | Misc Configuration | Corruptions | Custom WiFi


General Interface Settings:
Enable: Set MAC, Set TX Q Len, Set MTU, Set Offload, Set PROMISC
Services: HTTP, FTP, RADIUS, IPSEC-Client, IPsec-Upstream
Low Level: PROMISC, TSO Enabled, UFO Enabled, GSO Enabled, LRO Enabled, GRO Enabled

General Interface Settings (Detailed):
 Down Aux-Mgt
 DHCP-IPv6 DHCP Release DHCP Vendor ID: None
 DHCP-IPv4 Secondary-IPs DHCP Client ID: None
DNS Servers: BLANK Peer IP: NA
IP Address: 0.0.0.0 Global IPv6: AUTO
IP Mask: 0.0.0.0 Link IPv6: AUTO
Gateway IP: 0.0.0.0 IPv6 GW: AUTO
Alias: MTU: 1500
MAC Addr: 00:03:7f:30:e0:00 TX Q Len: 1000
Rpt Timer: medium (8 s) WiFi Bridge: NONE
IPSec GW: 0.0.0.0 IPSec Password:
IPSec Local ID.: IPSec Remote ID.:


WiFi Settings:
SSID: ABCD-wpa3 AP: DEFAULT
Key/Phrase: hello123 Mode: 802.11abgn-AC
Freq/Channel: 5745/149 Rate: 0S Default
 WPA WPA2 WPA3 OSEN WEP
 Disable HT40 Enable VHT160 Disable SGI

Buttons: Print, Display, Probe, Display Scan, Sync, Apply, OK, Cancel

D. Setup the STA with 11w PMF option Required.

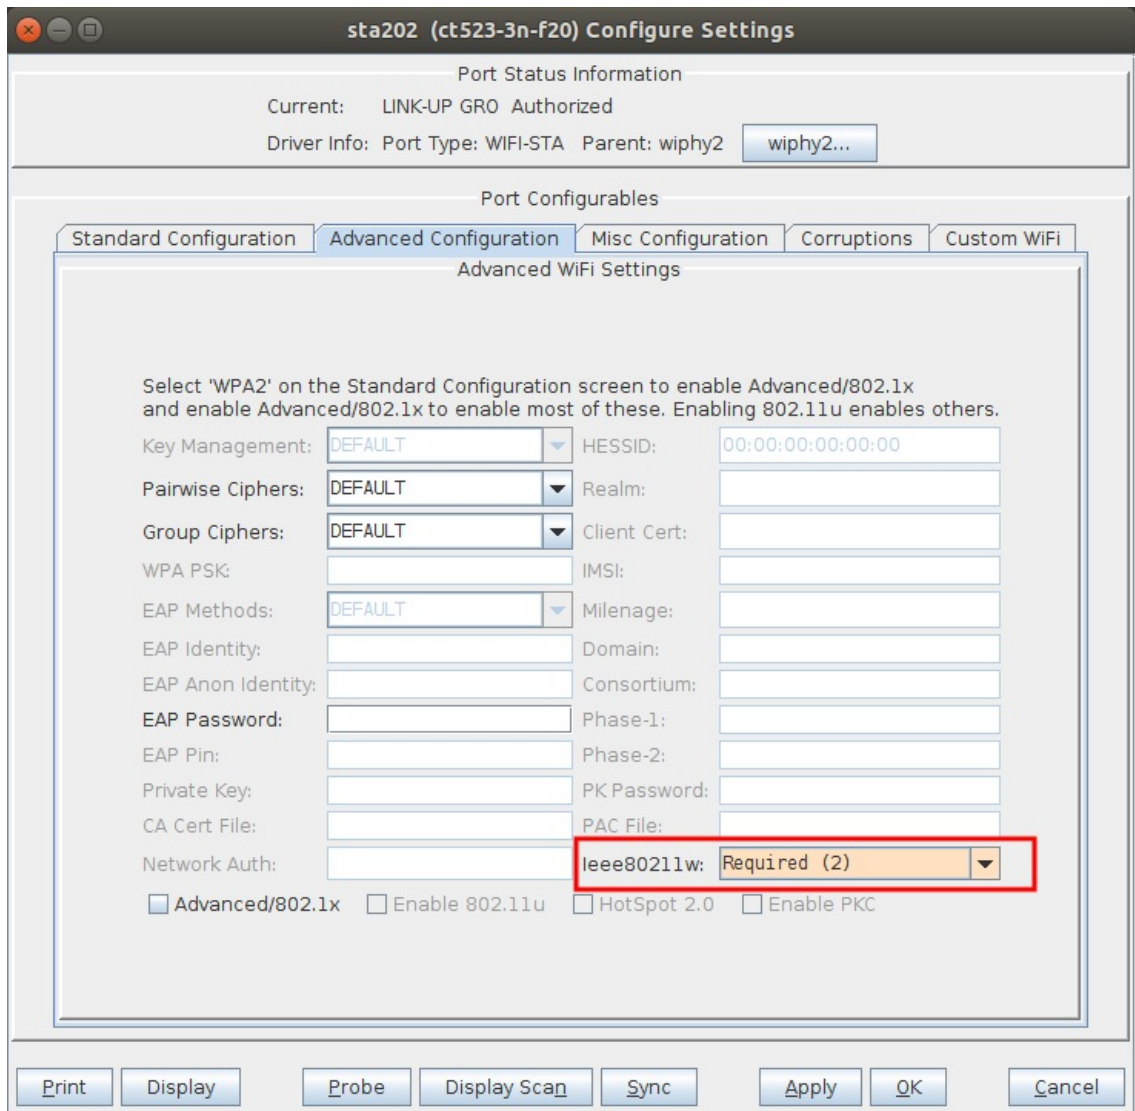

E. A capture of the association.

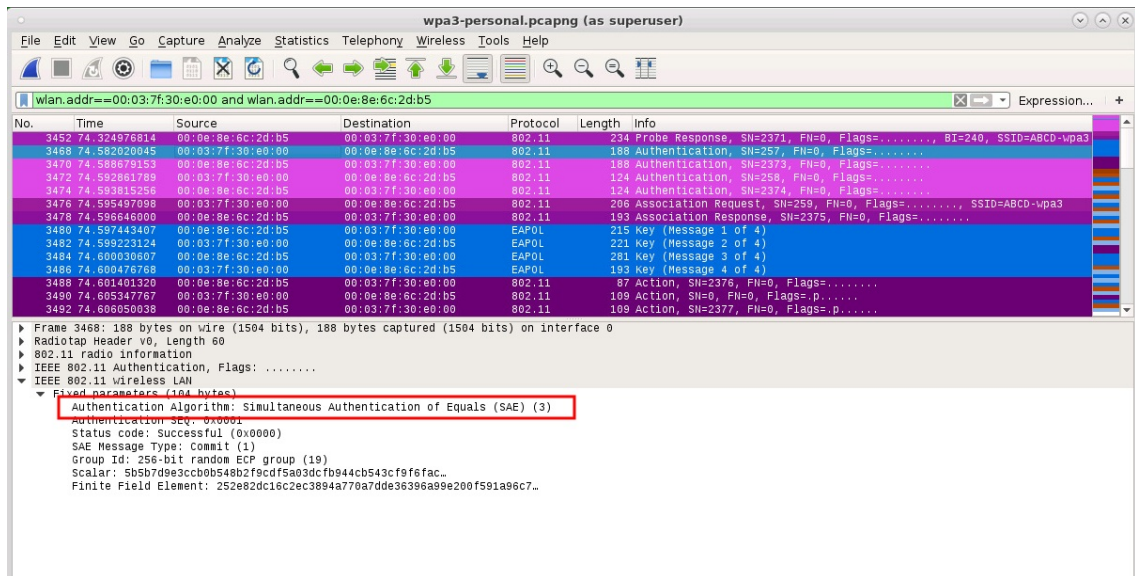

2. WPA3-Enterprise for a VAP and a STA client.

A. Setup a RADIUS server for the VAP. This example uses a [LANforge hostapd RADIUS server](#) on the same system as the VAP.

B. Setup the VAP with WPA3 security and no PSK on the standard configuration screen.

vap2 (ct521-1ac-f20) Configure Settings

Port Status Information
Current: LINK-UP GRO NONE
Driver Info: Port Type: WIFI-AP Parent: wiphy1 [wiphy1...](#)

Port Configurables

Standard Configuration | Advanced Configuration | Misc Configuration | Custom WiFi

Enable

- Set MAC
- Set TX Q Len
- Set MTU
- Set Offload
- Set PROMISC

Services

- HTTP
- FTP
- IPSEC-Client
- IPsec-Upstream

Low Level

- PROMISC
- TSO Enabled
- UFO Enabled
- GSO Enabled
- LRO Enabled
- GRO Enabled

General Interface Settings

- Down Aux-Mgt
- DHCP-IPv6 DHCP Release DHCP Vendor ID: None
- DHCP-IPv4 [Secondary-IPs](#) DHCP Client ID: None
- DNS Servers: BLANK Peer IP: NA
- IP Address: 20.100.1.1 Global IPv6: AUTO
- IP Mask: 255.255.255.0 Link IPv6: AUTO
- Gateway IP: 0.0.0.0 IPv6 GW: AUTO
- Alias: MTU: 1500
- MAC Addr: 00:0e:8e:6c:2d:b5 TX Q Len: 1000
- Rpt Timer: medium (8 s) WiFi Bridge: NONE
- IPSec GW: 0.0.0.0 IPSec Password:
- IPSec Local ID.:
- IPSec Remote ID.:

WiFi Settings

- SSID: ABCDE-wpa3 AP: DEFAULT
- Key/Phrase: Mode: (802.11abgn-AC)
- Freq/Channel: 5/45/149 Rate: OS Default
- DTIM-Period: 2 Max-STA: 2007
- Beacon: 240
- WPA WPA2 WPA3 OSEN WEP Verbose Debug
- Disable HT40 Disable HT80 Enable VHT160 Disable SGI

Print Display Logs Probe Display Scan Sync Apply OK Cancel

- C. Setup the VAP with 11w PMF option Required and select the checkbox for Advanced/802.1X which will also inform the VAP where its RADIUS server is located. In this example the LANforge hostapd RADIUS server is on the localhost.

- D. After enabling Advanced/802.1X, the VAP is automatically configured for both WPA-EAP-SUITE-B and WPA-EAP-SUITE-B-192 as shown in the back-end configuration for the VAP.

```
cat /home/lanforge/wifi/hostapd_vap2.conf
...
wpa_key_mgmt=WPA-EAP-SUITE-B WPA-EAP-SUITE-B-192
...
```

E. Setup the STA with WPA3 security and no PSK on the standard configuration screen.

The screenshot shows the configuration interface for a wireless station (sta203). The window title is "sta203 (ct523-3n-f20) Configure Settings".

Port Status Information:
Current: LINK-UP GRO Authorized
Driver Info: Port Type: WIFI-STA Parent: wiphy2 [wiphy2...]


Port Configurables:
Standard Configuration | Advanced Configuration | Misc Configuration | Corruptions | Custom WiFi

General Interface Settings:
Enable: [] Set MAC, [] Set TX Q Len, [] Set MTU, [] Set Offload, [] Set PROMISC
Services: [] HTTP, [] FTP, [] RADIUS, [] IPSEC-Client, [] IPsec-Upstream
Low Level: [] PROMISC, [] TSO Enabled, [] UFO Enabled, [] GSO Enabled, [] LRO Enabled, [x] GRO Enabled
[] Down, [] Aux-Mgt, [] DHCP-IPv6, [x] DHCP Release, DHCP Vendor ID: None, [x] DHCP-IPv4, Secondary-IPs, DHCP Client ID: None, DNS Servers: BLANK, Peer IP: NA, IP Address: 0.0.0.0, Global IPv6: AUTO, IP Mask: 0.0.0.0, Link IPv6: AUTO, Gateway IP: 0.0.0.0, IPv6 GW: AUTO, Alias: , MTU: 1500, MAC Addr: 00:03:7f:ce:63:00, TX Q Len: 1000, Rpt Timer: medium (8 s), WiFi Bridge: NONE, IPsec GW: 0.0.0.0, IPsec Password: , IPsec Local ID.: , IPsec Remote ID.:


WiFi Settings:
SSID: ABCDE-wpa3, AP: DEFAULT, Key/Phrase: , Mode: 802.11abgn-AC, Freq/Channel: 5745/149, Rate: 0S Default
[] WPA, [] WPA2, [x] WPA3, [] OSEN, [] WEP
[] Disable HT40, [] Enable VHT160, [] Disable SGI

Buttons: Print, Display, Probe, Display Scan, Sync, Apply, OK, Cancel

- F. Setup the STA with 11w PMF option Required and select the checkbox for Advanced/802.1X which allows choosing the Key Management scheme and EAP Method. Here the STA is setup to use WPA-EAP-SUITE-B with EAP-TTLS and a user identity and password that were configured with the RADIUS server setup.

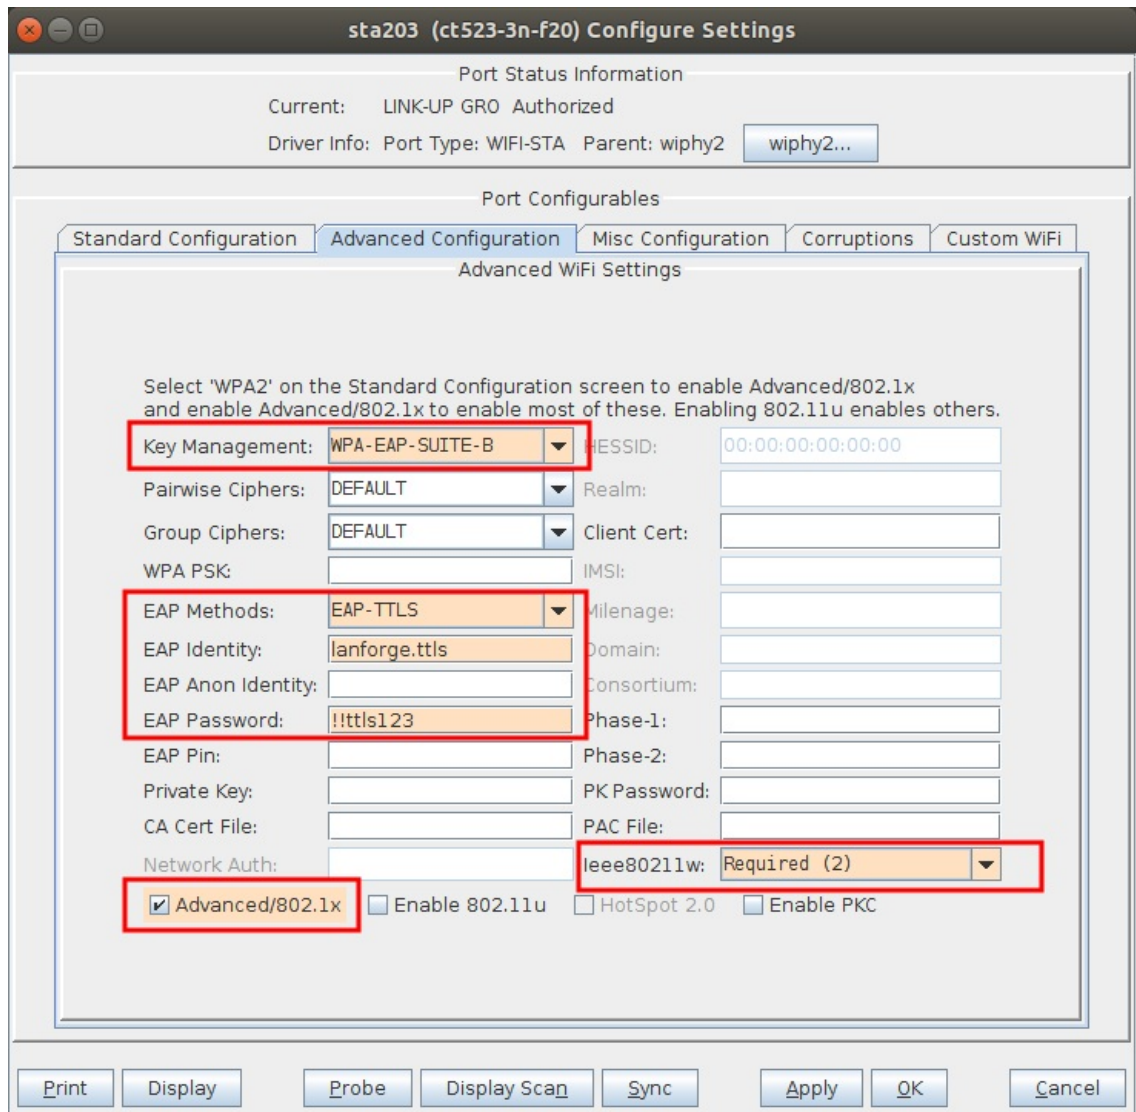


- G. A capture of the association.

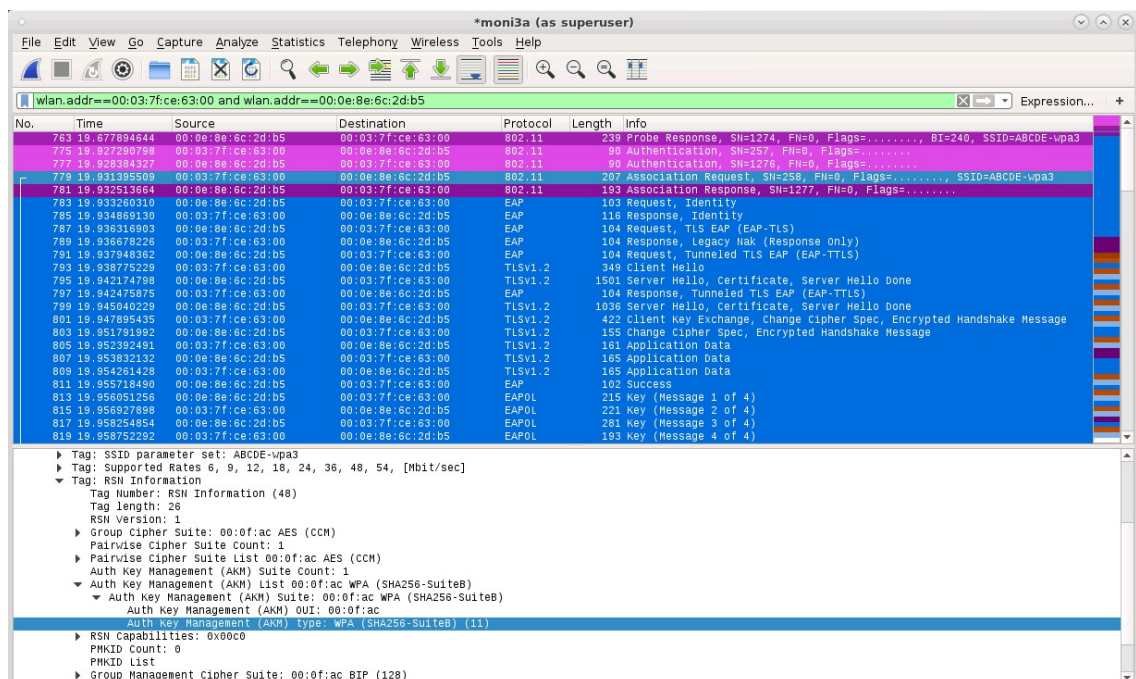

3. WPA3 OWE - Opportunistic Wireless Encryption.


- A. Setup the VAP with WPA3 security and a PSK on the standard configuration, then select option 11w PMF option Required on the advanced configuration, then admin up the VAP.

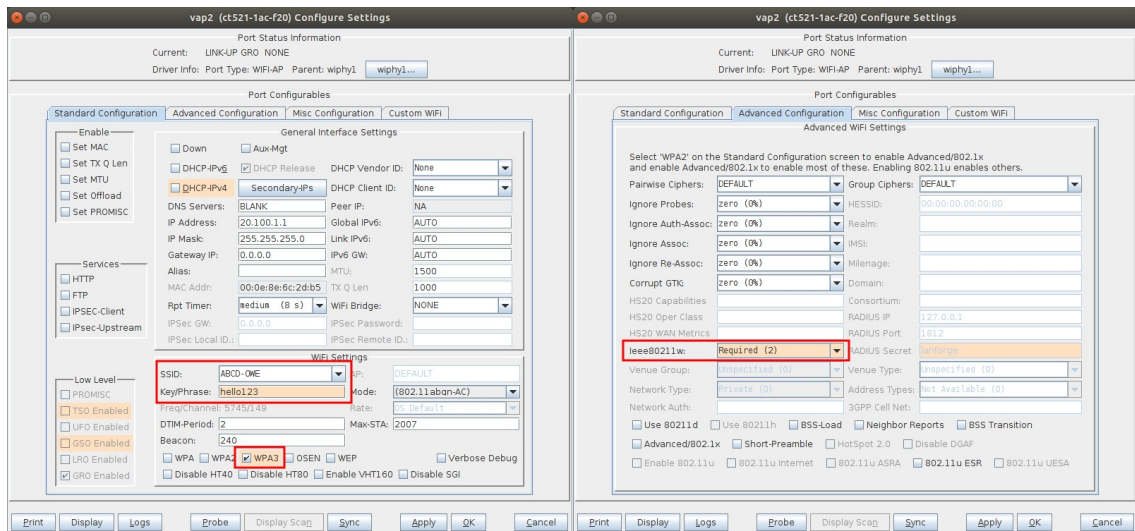

- B. Copy the back-end config file for the VAP to a new filename and edit the wpa_key_mgmt from SAE to OWE.

```
cd /home/lanforge/wifi
cp hostapd_vap2.conf vap2-owe.conf
vi vap2-owe.conf
wpa_key_mgmt=OWE
```

- C. Modify the VAP and select Custom WPA Cfg on the Misc Configuration screen then type in the location of the new VAP config file.

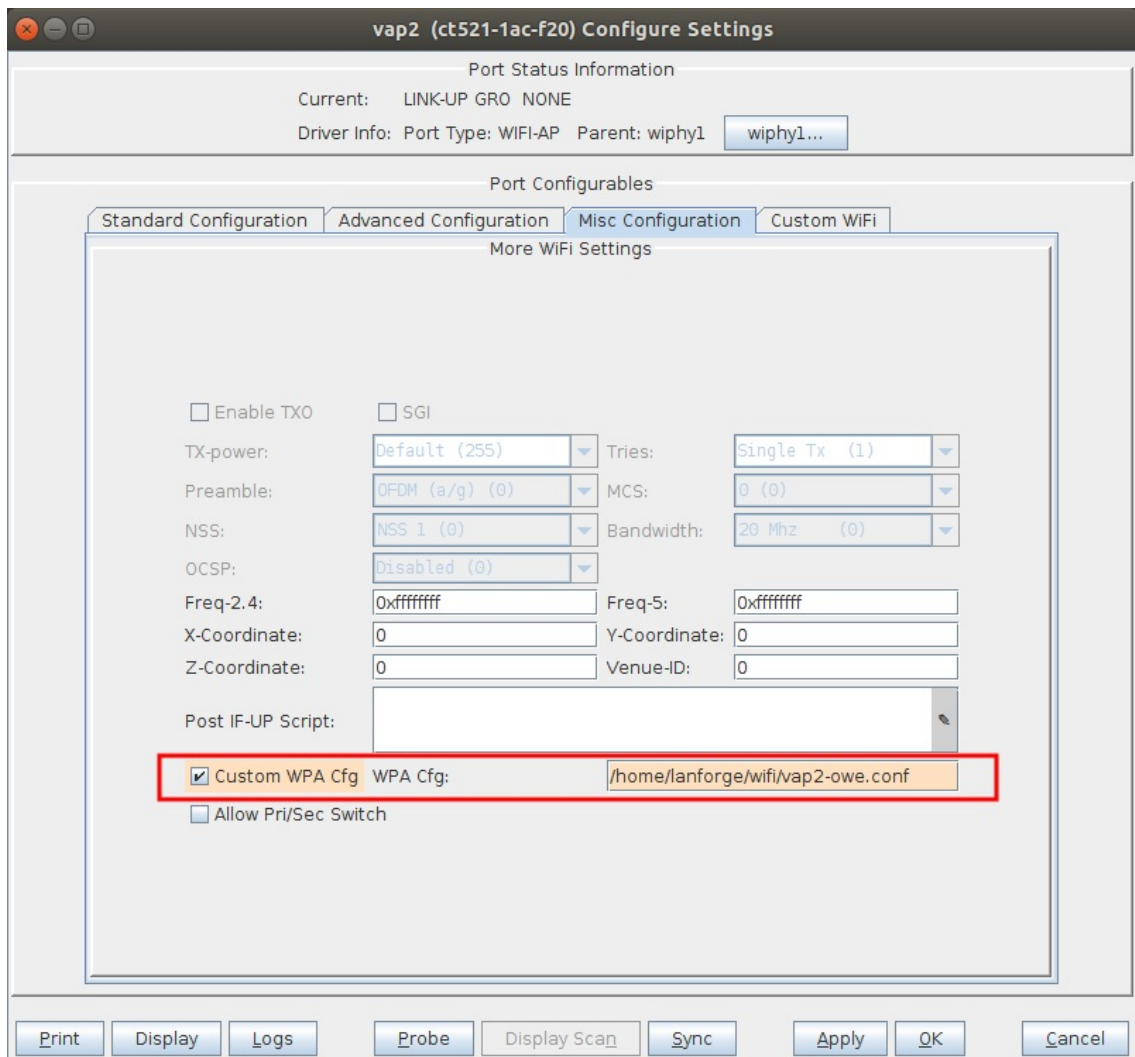

D. Setup the STA with WPA3 security and no PSK on the standard configuration screen.

Port Status Information
Current: LINK-UP GRO Authorized
Driver Info: Port Type: WIFI-STA Parent: wiphy2 wiphy2...

Port Configurables

Standard Configuration | Advanced Configuration | Misc Configuration | Corruptions | Custom WiFi

General Interface Settings

Enable

- Set MAC
- Set TX Q Len
- Set MTU
- Set Offload
- Set PROMISC

Services

- HTTP
- FTP
- RADIUS
- IPSEC-Client
- IPsec-Upstream

Low Level

- PROMISC
- TSO Enabled
- UFO Enabled
- GSO Enabled
- LRO Enabled
- GRO Enabled

General Interface Settings


- Down Aux-Mgt
- DHCP-IPv6 DHCP Release DHCP Vendor ID: None
- DHCP-IPv4 Secondary-IPs DHCP Client ID: None
- DNS Servers: BLANK Peer IP: NA
- IP Address: 0.0.0.0 Global IPv6: AUTO
- IP Mask: 0.0.0.0 Link IPv6: AUTO
- Gateway IP: 0.0.0.0 IPv6 GW: AUTO
- Alias: MTU: 1500
- MAC Addr: 00:03:7f:a3:cc:00 TX Q Len: 1000
- Rpt Timer: medium (8 s) WiFi Bridge: NONE
- IPSec GW: 0.0.0.0 IPSec Password:
- IPSec Local ID.: IPSec Remote ID.:

WiFi Settings

- SSID: ABCD-OWE AP: DEFAULT
- Key/Phrase: Mode: 802.11abgn-AC
- Freq/Channel: 5745/149 Rate: OS Default
- WPA WPA2 WPA3 OSEN WEP
- Disable HT40 Enable VHT160 Disable SGI

Print | Display | Probe | Display Scan | Sync | Apply | OK | Cancel

- E. Setup the STA with 11w PMF option Required and select the checkbox for Advanced/802.1X which allows choosing the Key Management scheme. Here the STA will use OWE and a WPA PSK.

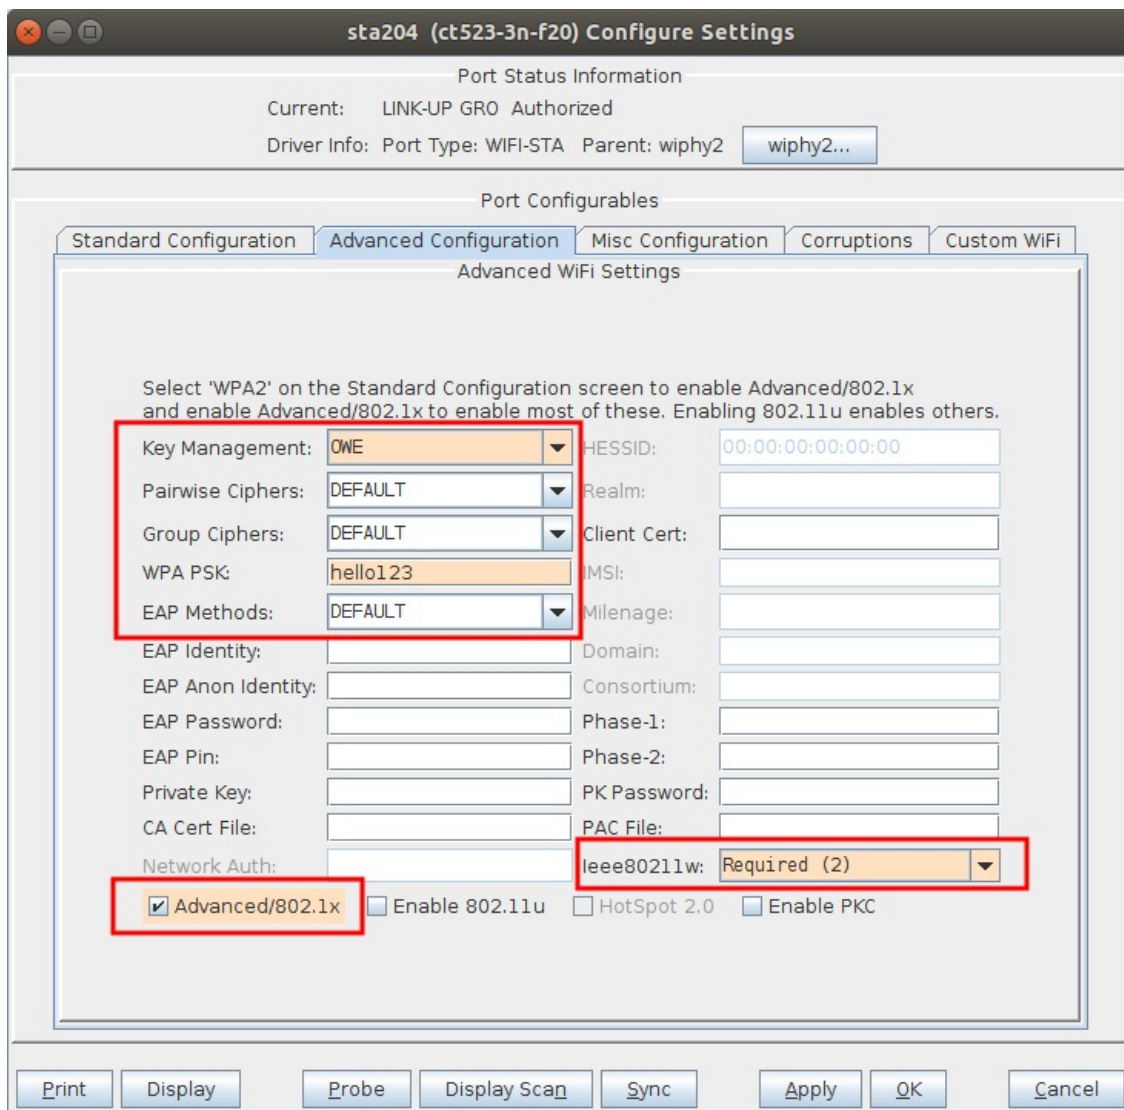

- F. A capture of the association.

